


FASTFIX® オールステンレス シールドタイプ

FAST-FIX RIVET: BBF-S シリーズ

材質
リベットボディ: ステンレス
マンドレル: ステンレス

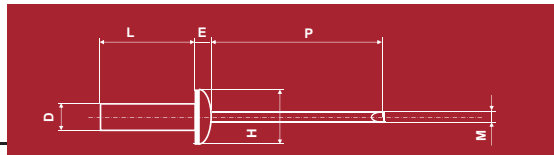


BBF-S シリーズ / オールステンレスシールドタイプ (丸頭)

リベット径 (D)	品番	適正 加締め板厚	L (最大)	H	E (最大)	加工物 穴径	M	P	引張強度 (N)	剪断強度 (N)	
3.2	BBF-S 41	0.5 - 1.6	7.5	6.0	1.27	3.3-3.4	1.9	29.0	2000	1780	
	BBF-S 42	1.6 - 3.2	9.1								29.0
	BBF-S 43	3.2 - 4.8	10.7								29.0
	BBF-S 44	4.8 - 6.4	12.3								29.0
	BBF-S 45	6.4 - 7.9	13.9								29.0
	BBF-S 46	7.9 - 9.5	15.5								29.0
	BBF-S 48	9.5 - 12.7	18.7								29.0
4.0	BBF-S 52	1.6 - 3.2	9.5	7.9	1.65	4.1-4.2	2.3	32.0	3560	3120	
	BBF-S 53	3.2 - 4.8	11.1								32.0
	BBF-S 54	4.8 - 6.4	12.7								32.0
	BBF-S 55	6.4 - 7.9	14.3								32.0
	BBF-S 56	7.9 - 9.5	15.9								32.0
	BBF-S 58	9.5 - 12.7	19.1								32.0
	4.8	BBF-S 62	1.6 - 3.2								10.3
BBF-S 63		3.2 - 4.8	11.9	29.0							
BBF-S 64		4.8 - 6.4	13.5	29.0							
BBF-S 66		6.4 - 9.5	16.7	29.0							
BBF-S 68		9.5 - 12.7	19.8	29.0							
BBF-S 610		12.7 - 15.9	23.0	29.0							
BBF-S 612		15.9 - 19.1	26.1	29.0							
6.4	BBF-S 82	1.6 - 3.2	11.3	12.7	2.54	6.5-6.6	3.8	32.0	8000	6000	
	BBF-S 84	3.2 - 6.4	14.5								32.0
	BBF-S 86	6.4 - 9.5	17.7								32.0
	BBF-S 88	9.5 - 12.7	20.8								32.0
	BBF-S 810	12.7 - 15.9	24.0								32.0
	BBF-S 812	15.9 - 19.1	27.2								32.0
	BBF-S 814	19.1 - 22.1	30.4								32.0
	BBF-S 816	22.1 - 25.4	33.5								32.0

FASTFIX® オールステンレス オープンタイプ

FAST-FIX RIVET: BBS シリーズ

材質
リベットボディ: ステンレス
マンドレル: ステンレス

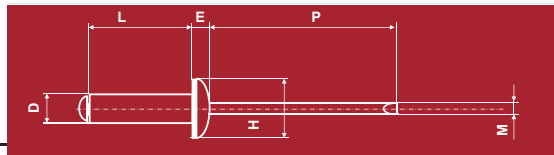


BBS シリーズ / オールステンレス オープンタイプ (丸頭)

リベット径 (D)	品番	適正 加締め板厚	L (最大)	H	E (最大)	加工物 穴径	M	P	引張強度 (N)	剪断強度 (N)	
3.2	BBS 41	0.5 - 1.6	5.4	6.4	1.02	3.3-3.4	1.9	29.0	2357	1868	
	BBS 42	1.6 - 3.2	7.0								29.0
	BBS 43	3.2 - 4.8	8.6								29.0
	BBS 44	4.8 - 6.4	10.2								29.0
	BBS 45	6.4 - 7.9	11.7								29.0
	BBS 46	7.9 - 9.5	13.3								29.0
	BBS 48	9.5 - 12.7	16.5								29.0
4.0	BBS 52	1.6 - 3.2	7.6	7.9	1.3	4.1-4.2	2.4	29.0	3647	2891	
	BBS 53	3.2 - 4.8	9.2								29.0
	BBS 54	4.8 - 6.4	10.8								29.0
	BBS 56	6.4 - 9.5	14.0								29.0
	BBS 58	9.5 - 12.7	17.1								29.0
	BBS 510	12.7 - 15.9	20.3								29.0
	4.8	BBS 62	1.6 - 3.2								8.3
BBS 63		3.2 - 4.8	9.8	29.0							
BBS 64		4.8 - 6.4	11.4	29.0							
BBS 66		6.4 - 9.5	14.6	29.0							
BBS 68		9.5 - 12.7	17.8	32.0							
BBS 610		12.7 - 15.9	21.0	32.0							
BBS 612		15.9 - 19.1	24.1	32.0							
BBS 614		19.1 - 22.2	27.3	32.0							
BBS 616		22.2 - 25.4	30.5	32.0							
6.4	BBS 82	1.6 - 3.2	9.5	12.7	2.03	6.5-6.6	3.8	32.0	9341	7562	
	BBS 84	3.2 - 6.4	12.7								32.0
	BBS 86	6.4 - 9.5	15.9								32.0
	BBS 88	9.5 - 12.7	19.1								32.0
	BBS 810	12.7 - 15.9	22.2								32.0
	BBS 812	15.9 - 19.1	25.4								32.0

FASTFIX® ステンレス・鉄 オープンタイプ

FAST-FIX RIVET: BS シリーズ

材質
リベットボディ: ステンレス
マンドレル: 鉄

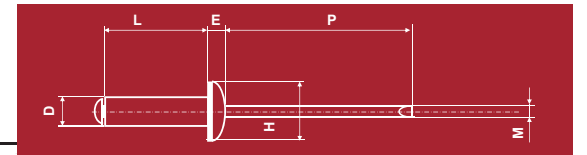


BS シリーズ / ステンレス・鉄 オープンタイプ (丸頭)

リベット径 (D)	品番	適正 加締め板厚	L (最大)	H	E (最大)	加工物 穴径	M	P	引張強度 (N)	剪断強度 (N)								
3.2	BS 41	0.5 - 1.6	5.4	6.4	1.02	3.3-3.4	1.9	29.0	2357	1868								
	BS 42	1.6 - 3.2	7.0								29.0							
	BS 43	3.2 - 4.8	8.6								29.0							
	BS 44	4.8 - 6.4	10.2								29.0							
	BS 45	6.4 - 7.9	11.7								29.0							
	BS 46	7.9 - 9.5	13.3								29.0							
	BS 48	9.5 - 12.7	16.5								29.0							
	4.0	BS 52	1.6 - 3.2								7.6	7.9	1.3	4.1-4.2	2.4	29.0	3647	2891
BS 53		3.2 - 4.8	9.2	29.0														
BS 54		4.8 - 6.4	10.8	29.0														
BS 56		6.4 - 9.5	14.0	29.0														
BS 58		9.5 - 12.7	17.1	29.0														
BS 510		12.7 - 15.9	20.3	29.0														
4.8		BS 62	1.6 - 3.2	8.3	9.5	1.52	4.9-5.0	2.9	29.0	5338	4226							
		BS 63	3.2 - 4.8	9.8														
	BS 64	4.8 - 6.4	11.4	29.0														
	BS 66	6.4 - 9.5	14.6	29.0														
	BS 68	9.5 - 12.7	17.8	32.0														
	BS 610	12.7 - 15.9	21.0	32.0														
	BS 612	15.9 - 19.1	24.1	32.0														
	BS 614	19.1 - 22.2	27.3	32.0														
	BS 616	22.2 - 25.4	30.5	32.0														
	6.4	BS 82	1.6 - 3.2	9.5								12.7	2.03	6.5-6.6	3.8	32.0	9341	7562
BS 84		3.2 - 6.4	12.7	32.0														
BS 86		6.4 - 9.5	15.9	32.0														
BS 88		9.5 - 12.7	19.1	32.0														
BS 810		12.7 - 15.9	22.2	32.0														
BS 812		15.9 - 19.1	25.4	32.0														

FASTFIX® オール鉄 オープンタイプ

FAST-FIX RIVET: SS シリーズ

材質
リベットボディ: 鉄
マンドレル: 鉄

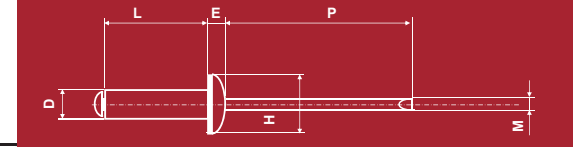

SS シリーズ / オール鉄 オープンタイプ (丸頭)

リベット径 (D)	品番	適正 加締め板厚	L (最大)	H	E (最大)	加工物 穴径	M	P	引張強度 (N)	剪断強度 (N)								
3.2	SS 41	0.5 - 1.6	5.4	6.4	1.02	3.3-3.4	1.9	29.0	1379	1156								
	SS 42	1.6 - 3.2	7.0								29.0							
	SS 43	3.2 - 4.8	8.6								29.0							
	SS 44	4.8 - 6.4	10.2								29.0							
	SS 45	6.4 - 7.9	11.7								29.0							
	SS 46	7.9 - 9.5	13.3								29.0							
	SS 48	9.5 - 12.7	16.5								29.0							
	4.0	SS 52	1.6 - 3.2								7.6	7.9	1.3	4.1-4.2	2.4	29.0	2091	1646
SS 53		3.2 - 4.8	9.2	29.0														
SS 54		4.8 - 6.4	10.8	29.0														
SS 56		6.4 - 9.5	14.0	29.0														
SS 58		9.5 - 12.7	17.1	29.0														
SS 510		12.7 - 15.9	20.3	29.0														
4.8		SS 62	1.6 - 3.2	8.3	9.5	1.52	4.9-5.0	2.9	29.0	3025	2402							
		SS 63	3.2 - 4.8	9.8														
	SS 64	4.8 - 6.4	11.4	29.0														
	SS 66	6.4 - 9.5	14.6	29.0														
	SS 68	9.5 - 12.7	17.8	29.0														
	SS 610	12.7 - 15.9	21.0	29.0														
	SS 612	15.9 - 19.1	24.1	29.0														
	SS 614	19.1 - 22.2	27.3	29.0														
	SS 616	22.2 - 25.4	30.5	29.0														
	6.4	SS 82	1.6 - 3.2	9.5								12.7	2.03	6.5-6.6	3.8	40.0	5516	4448
SS 84		3.2 - 6.4	12.7	40.0														
SS 86		6.4 - 9.5	15.9	40.0														
SS 88		9.5 - 12.7	19.1	40.0														
SS 810		12.7 - 15.9	22.2	40.0														
SS 812		15.9 - 19.1	25.4	40.0														